


Country of Origin : China

Operating Temperature : 0 ~ 45° C

Dimension : 72 x 42.5 x 26 mm

Approvals / Marks : UL, c-UL, TÜV, CE, CCC, PSE
EN60601 Medical

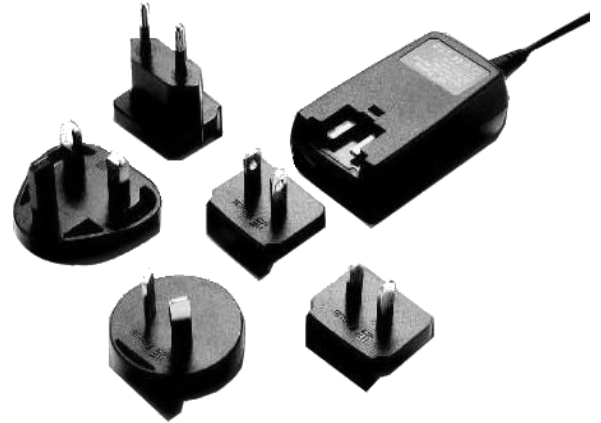

Features:

Wall-mount Adapter with Exchangeable Plug

Wide input voltage range 100~240 VAC

Output voltage available from 3 ~ 24 VDC

Output connector: standard: 5.5 x 2.1 x 9.5mm or customer requirement

Low standby power 0.3W max.

1 year warranty


Specification:

| | MODEL | Voltage | Current | Tolerance | Ripple & Noise | Max. Power |
|---------------|------------------|-----------------|---------------|-----------|----------------|------------|
| OUTPUT | DUE15WCP-3.0 | 3 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 6W |
| | DUE15WCP-3.3 | 3.3 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 6.6W |
| | DUE15WCP-3.6 | 3.6 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 7.2W |
| | DUE15WCP-4.0 | 4 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 8W |
| | DUE15WCP-4.2 | 4.2 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 8.4W |
| | DUE15WCP-4.5 | 4.5 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 9W |
| | DUE15WCP-5.0 | 5 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 10W |
| | DUE15WCP-5.2 | 5.2 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 10.4W |
| | DUE15WCP-5.5 | 5.5 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 11W |
| | DUE15WCP-6.0 | 6 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 12W |
| | DUE15WCP-6.5 | 6.5 VDC | 0.10 ~ 2.00 A | 5% | 100mV | 13W |
| | DUE15WCP-7.0 | 7 VDC | 0.10 ~ 1.70 A | 5% | 100mV | 11.9W |
| | DUE15WCP-7.5 | 7.5 VDC | 0.10 ~ 1.50 A | 5% | 100mV | 11.25W |
| | DUE15WCP-8.0 | 8 VDC | 0.10 ~ 1.50 A | 5% | 100mV | 12W |
| | DUE15WCP-8.5 | 8.5 VDC | 0.10 ~ 1.40 A | 5% | 100mV | 11.9W |
| | DUE15WCP-9.0 | 9 VDC | 0.10 ~ 1.30 A | 5% | 100mV | 11.7W |
| | DUE15WCP-10.0 | 10 VDC | 0.10 ~ 1.25 A | 5% | 100mV | 12.5W |
| | DUE15WCP-10.5 | 10.5 VDC | 0.10 ~ 1.25 A | 5% | 100mV | 13.125W |
| | DUE15WCP-12.0 | 12 VDC | 0.10 ~ 1.25 A | 5% | 150mV | 15W |
| | DUE15WCP-13.8 | 13.8 VDC | 0.10 ~ 1.00 A | 5% | 150mV | 13.8W |
| | DUE15WCP-15.0 | 15 VDC | 0.10 ~ 0.90 A | 5% | 150mV | 13.5W |
| | DUE15WCP-16.0 | 16 VDC | 0.10 ~ 0.85 A | 5% | 200mV | 13.6W |
| | DUE15WCP-17.5 | 17.5 VDC | 0.10 ~ 0.80 A | 5% | 200mV | 14W |
| | DUE15WCP-18.0 | 18 VDC | 0.10 ~ 0.80 A | 5% | 200mV | 14.4W |
| DUE15WCP-24.0 | 24 VDC | 0.10 ~ 0.63 A | 5% | 200mV | 15.12W | |
| | Efficiency (typ) | 60% @ full load | | | | |


| | | |
|-------------|---|---|
| INPUT | Voltage | 100 ~ 240VAC |
| | Frequency | 50 ~ 60 Hz |
| | Current | 0.4A @ 90VAC input |
| | Inrush Current | 40A @ 220VAC input |
| | Leakage Current | < 0.1mA @ 240VAC input |
| PROTECTION | Over Current | Yes |
| | Short Circuit | Output protected, auto recovery after short condition has been removed |
| OTHERS | Standby Power | 0.3W max. |
| | Cooling | Free air convection |
| | Withstand Voltage | I/P-O/P: 3000VAC or 4242VDC / 1 minute |
| | Insulation Resist. | I/P-O/P, I/P-FG : 500VDC / 10M Ohm |
| Environment | Temperature | Operating: 0 ~ 45°C / Storage: -20 ~ 80°C |
| | Humidity | Operating: 10% ~ 90% RH (non condensing) / Storage: 5% ~ 90% RH (non condensing) |
| Connection | Input | Plugs: EU (17g), UK (20g), US (10g), AUS (15g), China (10g), Japan (10g) (exchangeable) |
| | Output | Plug: standard: 2.1x5.5x9.5mm, center '+' or customer requirement // Cable: 180cm |
| M.T.B.F. | 100 K hours (according to MIL-HDBK-217F in 25°C environment) | |
| SAFETY | Approved: UL 60950 / UL 2601 / TÜV 60950 / TÜV EN60601 / CSA 60950 / CSA601 | |
| EMC | CISPR22 1997 Class B / EN55022 Class B / FCC Part 15 subpart B, CLASS B | |
| WEIGHT | N.W.: 0.122 kg without AC-plug | |



UK



EU



China



USA



Australia

