

Features

- Compliant to DoE 2016 (Level VI)
- ErP Stage 2, NRCan & GEMS Level VI
- No Load Power Consumption < 0.1 W
- Regulated Output with Low Ripple Noise
- 1 Year Warranty



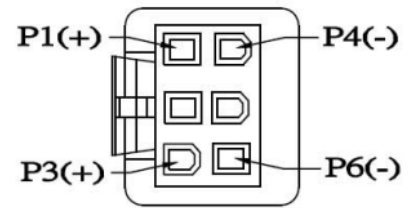

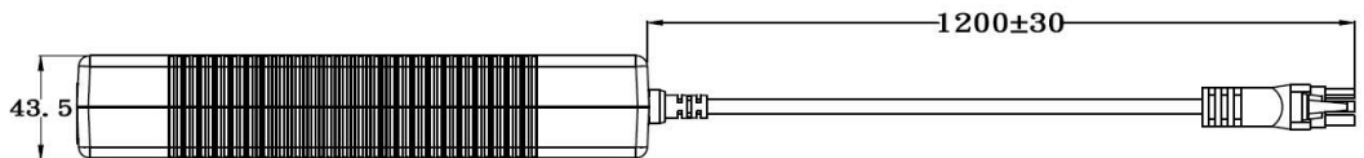
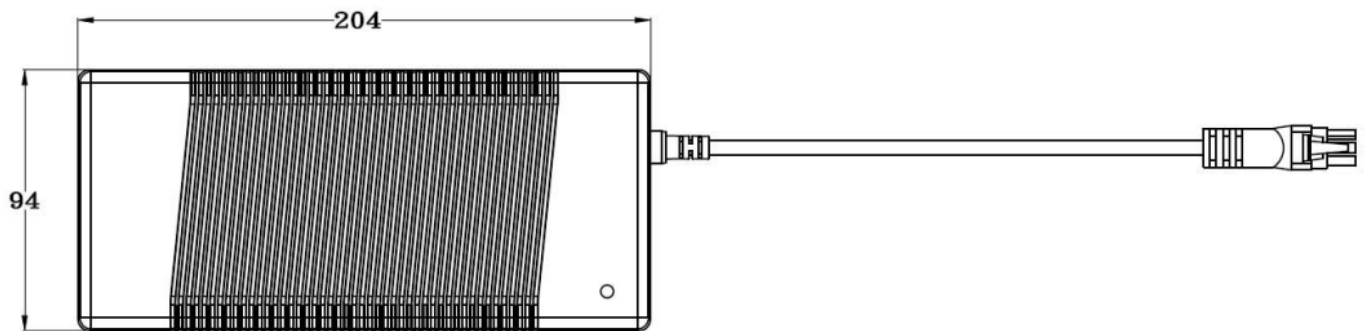
Marks / Approvals

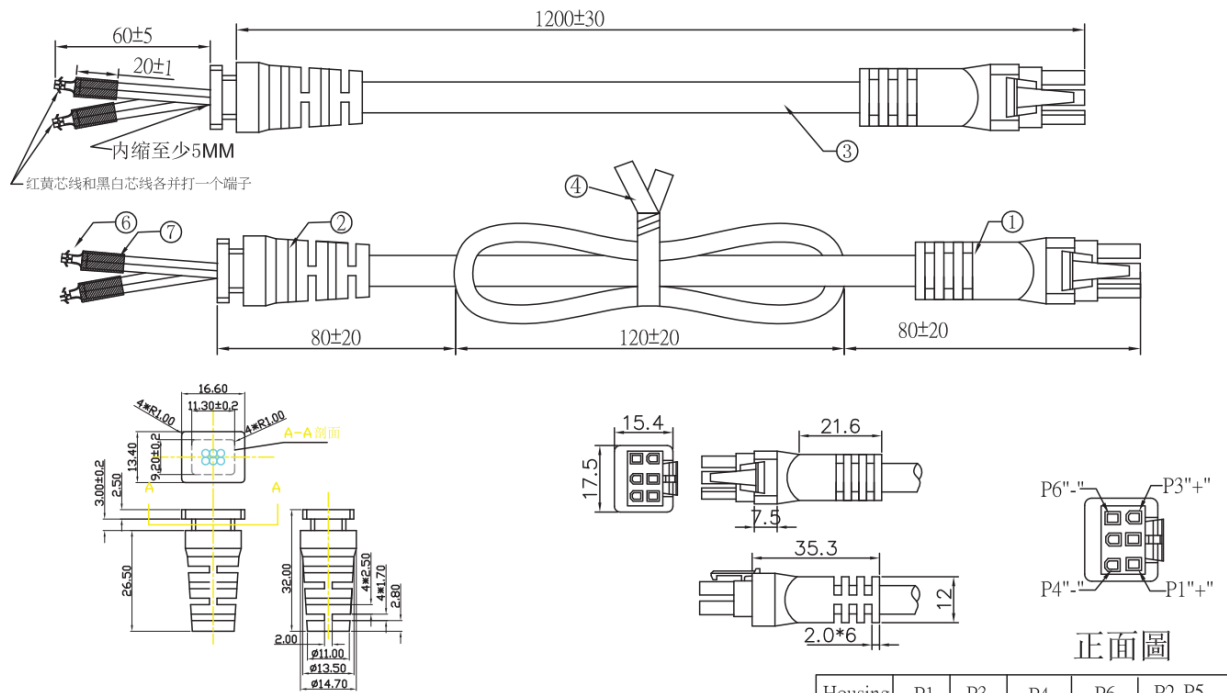


Specifications

Product similar to photo, variations possible.

	MODEL	Voltage	Min. Load	Max. Load	Max. Power
	ATS 250T-P120	12 V	0.00 A	20.00 A	240 W
	ATS 250T-P150	15 V	0.00 A	16.66 A	250 W
	ATS 250T-P190	19 V	0.00 A	13.15 A	250 W
	ATS 250T-P240	24 V	0.00 A	10.42 A	250 W
	ATS 250T-P480	48 V	0.00 A	5.21 A	250 W
	ATS 250T-P560	56 V	0.00 A	4.46 A	250 W
INPUT	Voltage	AC 100 V – 240 V			
	Frequency	50 Hz - 60 Hz			
	Current	3 A max.			
	Protection	Internal Primary Current Fuse, Inrush Limiting			
OUTPUT	Load Regulation	± 5 % (typical)			
	Ripple	1 % – 2 % V p-p max. for output voltage at full load			
	Transient Response	0.5 ms for 50 % load change typical			
	Leakage Current	0.25 mA max.			
	Protection	Short circuit Protection • Over Voltage Protection • Over Current Protection			
OTHERS	Cooling	Convection			
	Efficiency	DoE Level VI • Energy Star • ErP Stage 2 • NRCan & GEMS Level VI Certified			
	Holdup Time	10 ms at full load			
	Dielectric Withstand	AC 3000 V Primary – Secondary			
	MTBF	300,000 calculated hours at 25 °C by Telcordia SR-332			
ENVIRONMENT	Temperature	Operating: 0 °C – 40 °C / Storage: -20 °C – 80 °C			
	Humidity	Operating: 20 % RH – 80 % RH / Storage: 10 % RH – 90 % RH			
EMI Conduction & Radiation	Compliance to EN 55032				
Harmonic Current	Compliance to EN 61000-3-2, -3				
EMS Immunity	Compliance to IEC 61000-1-2, -3, -4, -5, -6, -8, -11				
Safety	IEC / EN / UL 62368-1 • IEC 60950-1 • CE • RCM • PSE • BSMI				
Case Dimensions	204 x 94 x 43.5 mm				
Weight	1 040 g typical				

8.Mechanical :**8.1 Weight : 1040 g Typical****8.2 Cable Type : Black UL2464 16AWG*4C****(Wire + Plug)****Plug : 6Pin Housing****8.3 Cable Length : 1200mm****8.4 Case Dimension : 204 mm(L)*94 mm(W)*43.5mm(H)****8.5 Material Flammability : UL 94V-0****8.6 External Apperance : As drawing below (Scale → mm)****Output Cable Plug Pin Assignment****FRONT-VIEW**



Technical drawings exemplary for ATS300T-P240 (6 Pin Housing)(VI)-RevA1-20161121