

SPU151B series

V2.4

The SPU151B series of AC/DC switching mode power supplies provide 150 Watts of continuous output power. All models meet FCC Part-15, AS/NZS CISPR 32 and EN55032 and EN55032 class B emission Limits, EN55035, BS EN55035 and are designed to comply with UL/cUL and conformity assessment in CE marking. All units pass burn-in test at full load condition.



150W External Power Supply for General Purpose

FEATURES:

- * Wide Operating Voltage, 90 to 260 VAC, 47 to 63 Hz
- * IEC-320-C8 Input Inlet
- * Single Output
- * Over Voltage Protection (latch off)
- * Active Power Factor Correction
- * DoE VI
- * Operating Altitude 5000m
- * 3 year warranty

APPLICATIONS:

- * Industrial PC
- * Power Tools
- * Audio & Video Equipment
- * Inspection Analyzer

APPROVALS:



GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Protection Classes:** Class II
- * **Safety:** CAN/CSA C22.2 NO.62368-1-1, EN62368-1:2014+A11:2017, IEC62368-1, UL62368-1:2nd, EN60950-1:2006 /A2:2013, IEC 60950-1:2005 /A2:2013

Electrical Characteristics:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Input Operate Voltage Range	Detail to See Fig.1	90		260	VAC
Input Frequency	Sine Wave	47		63	Hz
Power Factor Correction		0.95		1	
Output Power Range	See Rating Chart			150	W
Low Line Input Current	Full Load, Vin=100VAC		2		A
High Line Input Current	Full Load, Vin=240VAC		0.8		A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=100VAC			60	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=240VAC			120	A
Efficiency	Full Load, Vin=230VAC, Detail to See Rating Chart	See Rating Chart			
Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC			1	%
Over Voltage Protection	Latch Off, Recycle Input to Reset	112		132	%
Over Load Protection	Recovers Automatically after Fault Condition is Removed	110		150	%
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=110VAC	See Rating Chart			
Start-up time	Full Load, Vin=100~240VAC			2	s
Insulation Resistance	Primary to Secondary, 500VDC, 25°C/ 70% RH	50			MΩ
Temperature Coefficient	All Condition			±0.04	%/°C
Dielectric Withstanding Voltage (P-S)	Primary to Secondary, Limit Current <10mA			4242	VDC
EMC Emission	Compliance to EN55032 (CISPR32), EN55035	B			Class

Environmental:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Detail to See Fig.2 (Derate Linearly from 100% Load at 40°C to 50% Load at 70°C)	-20		70	°C
Storage Temperature	10 ~ 95% RH	-40		85	°C
Operating Humidity	Non-Condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			8	kV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			4	kV
Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	100k			h
Operating Altitude (Elevation)	All Condition			5000	m
Vibration	10 ~ 500Hz, 10min./1cycle, 60min. Each Along X, Y, Z axes			5	G
Surge Voltage	Line-Neutral			1	kV

SPU151B series



V2.4

150W External Power Supply for General Purpose


SPECIFICATION NOTE :

1. Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
2. At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
3. Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
4. Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
5. The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
6. Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
7. Efficiency is measured at rated load, and nominal line.

MECHANICAL DIMENSIONS: (UNIT: mm [inch])

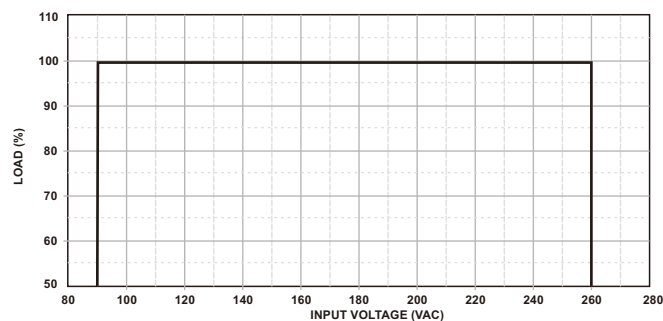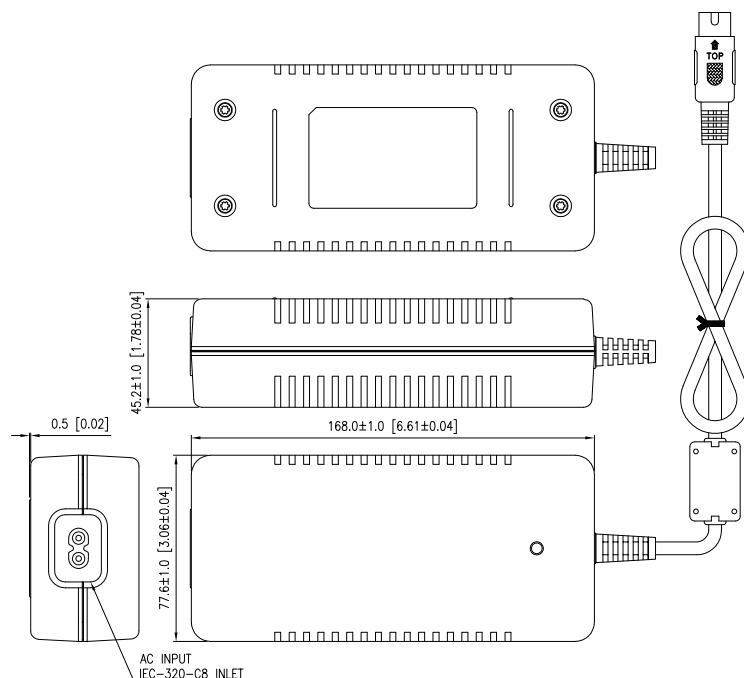

(FIG.1) INPUT VOLTAGE DERATING CURVE

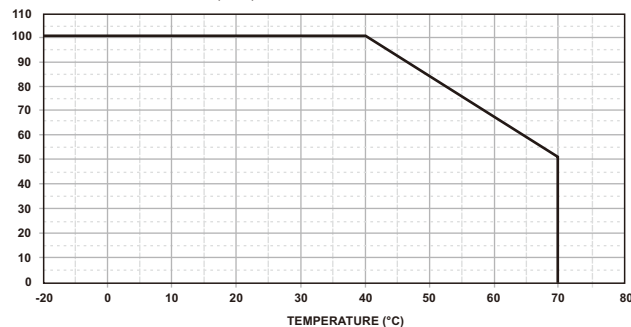

(FIG.2) TEMPERATURE DERATING CURVE

OUTPUT CABLE RECOMMEND :

1. Selected output connectors and wire, please refer to Appendix.
2. SPU151B-105~107 is required to use AWG#16/5C/4FT output cable.
3. SPU151B-108~111 is required to use AWG#14/2C/4FT output cable.
4. The regulation and efficiency will be changed by modified output cable.
5. SPU151B-105~111 output cable must with core.

PACKING :

1. Net weight: 720~750g approx.
2. Optional output connectors available contact sales for details.

Rating Chart:

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)	Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
	(VDC)	(A)	(W)	(mVp-p)	(%)	(%)	(W)	(ms)	
SPU151B-105	12.0	12.5	150	120	±5	88	0.21	16	Hiccup
SPU151B-106	15.0	10.0	150	150	±5	88	0.21	16	Hiccup
SPU151B-107	19.0	7.89	150	190	±5	89	0.21	16	Hiccup
SPU151B-108	24.0	6.25	150	240	±4	89	0.21	16	Hiccup
SPU151B-109	30.0	5.00	150	300	±3	90	0.21	16	Hiccup
SPU151B-110	36.0	4.16	150	300	±3	90	0.21	16	Hiccup
SPU151B-111	48.0	3.12	150	300	±3	91	0.21	16	Hiccup