


MBU81 series

V1.8

The MBU81 series of AC/DC switching mode power supplies provide 80 Watts of continuous output power. All models meet FCC Part-18, CISPR-11 and EN55011 class B emission Limits, IEC 60601-1-2 and are designed to comply with UL/cUL, TUV T-mark and conformity assessment in CE marking. All units pass burn-in test at full load condition.



APPROVALS:



Electrical Characteristics:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Input Operate Voltage Range	Detail to See Fig.1	90		260	VAC
Input Frequency	Sine Wave	47		63	Hz
Power Factor Correction		0.95		1	
Output Power Range	See Rating Chart			80	W
Low Line Input Current	Full Load, Vin=100VAC		1.2		A
High Line Input Current	Full Load, Vin=240VAC		0.4		A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=100VAC			28	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=240VAC			56	A
Safety Ground Leakage Current	Vin=264VAC, Fi=63Hz			0.17	mA
Efficiency	Full Load, Vin=230VAC, Detail to See Rating Chart	See Rating Chart			
Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC	0.5		1	%
Over Voltage Protection		112		132	%
Over Load Protection	Recovers Automatically After Fault Condition is Removed	110		150	%
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=100VAC	See Rating Chart			
Start-up time	Full Load, Vin=100~240VAC			2	s
Insulation Resistance	Primary to Secondary, 500VDC, 25°C/ 70% RH	50			MΩ
Temperature Coefficient	All Condition			±0.04	%/°C
Dielectric Withstanding Voltage (P-S)	Primary to Secondary, Limit Current <10mA			4000	VAC
Dielectric Withstanding Voltage (P-G)	Primary to PE, Limit Current <10mA			1500	VAC
EMC Emission	Compliance to EN55011 (CISPR11), EN60601-1-2	B			Class


Environmental:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Detail to See Fig.2 (Derate Linearly from 100% Load at 50°C to 50% Load at 70°C)	-10		70	°C
Storage Temperature	10 ~ 95% RH	-40		85	°C
Operating Humidity	Non-Condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			15	kV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			8	kV
Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	200k			h
Operating Altitude (Elevation)	All Condition			3000	m
Vibration	10 ~ 500Hz, 10min./1cycle, 60min. Each Along X, Y, Z Axes			5	G
Surge Voltage	Line-Neutral			1	kV
Surge Voltage	Line-PE & Neutral-PE			2	kV

80W Open Frame Medical Grade Power Supply

FEATURES:

- * Wide Operating Voltage, 90 to 260 VAC, 47 to 63 Hz
- * Single Output
- * Crowbar Mode Over Voltage Protection
- * Input to Output : 2MOPP
- * High ESD Immunity
- * Suitable Professional Healthcare Facility
- * Active Power Factor Correction
- * 5-Year Warranty



APPLICATIONS:

- * Medical Equipment
- * Patient Monitor
- * Ultrasound System
- * Blood Chemistry Analyzer
- * Medical Image

GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Protection Classes:** Class I
- * **Safety:** IEC 60601-1 Edition 3.1, IEC 60601-1 Edition 3.2, EN 60601-1, ANSI/AAMI ES60601-1, CSA-C22.2 NO. 60601-1


MBU81 series

V1.8


80W Open Frame Medical Grade Power Supply

SPECIFICATION NOTE :

- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
- The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

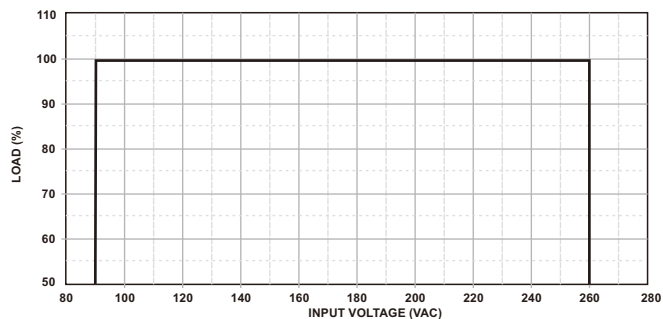


(FIG.1) INPUT VOLTAGE DERATING CURVE

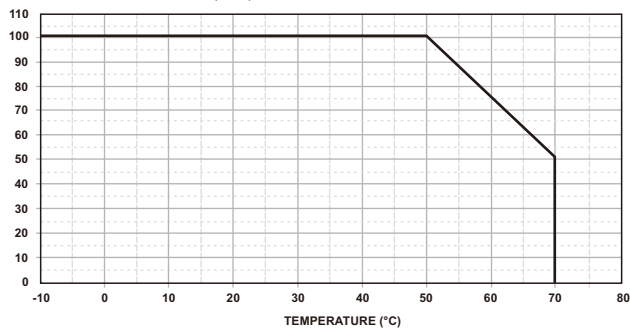

(FIG.2) TEMPERATURE DERATING CURVE

MECHANICAL DIMENSIONS: (UNIT: mm [inch])

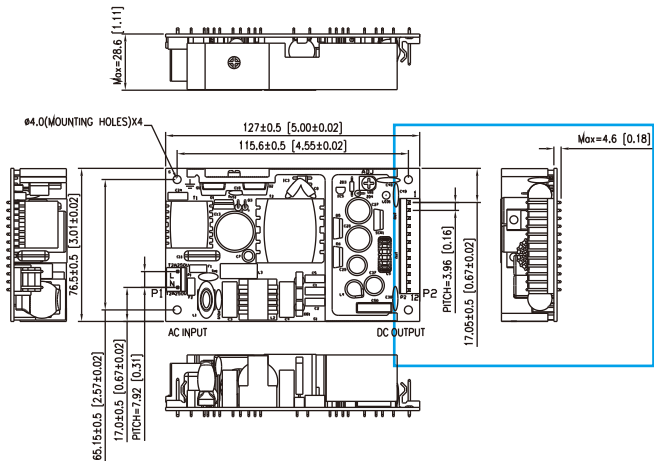

PACKING :

- Net weight: 300g approx.
- Input connector mates with Molex housing 09-50-3031 and Molex 2478 series crimp terminal.
- Output connector mates with screw terminal (Terminal Block) (16-22AWG) or Molex housing 09-50-3121 and Molex 2478 series crimp terminal.

PIN CHART

MODEL \ PIN	1	2	3	4	5	6	7	8	9	10	11	12
MBU81-1XX-12PIN	RTN	RTN	RTN	RTN	RTN	RTN	Vout	Vout	Vout	Vout	Vout	Vout

MODEL \ PIN	1	2	3	4	5	6
MBU81-1XX-6PIN	RTN	RTN	RTN	Vout	Vout	Vout

Rating Chart:

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)	Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
	(VDC)	(A)	(W)	(mVp-p)	(%)	(%)	(W)	(ms)	
MBU81-102	5.0	14.00	70	100	±5	75	0.5	16	Hiccup
*MBU81-103	7.0	11.43	80	100	±5	78	0.5	16	Hiccup
MBU81-104	9.0	8.89	80	100	±4	79	0.5	16	Hiccup
MBU81-105	12.0	6.66	80	100	±3	83	0.5	16	Hiccup
MBU81-106	15.0	5.33	80	100	±3	83	0.5	16	Hiccup
MBU81-107	18.0	4.44	80	100	±3	83	0.5	16	Hiccup
MBU81-108	24.0	3.33	80	100	±2	84	0.5	16	Hiccup
*MBU81-109	30.0	2.66	80	100	±2	84	0.5	16	Hiccup
*MBU81-110	36.0	2.22	80	100	±2	85	0.5	16	Hiccup

[*] = MOQ is required. Please contact sales.