


Features

- Europe / UK / USA (AC Plug Changeable)
- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- EMC: IEC 60601-1-2 (Edition 4.1)
- Means of Protection: 2x MOPP
- 100-240VAC Universal Input
- Regulated Output with Low Ripple Noise
- 2 Years Manufacturer Warranty

Approvals

Safety	CB, TÜV, UL, cUL, PSE
EMC	CE, FCC Class B
Efficiency	ErP Stage 2, DoE Level VI

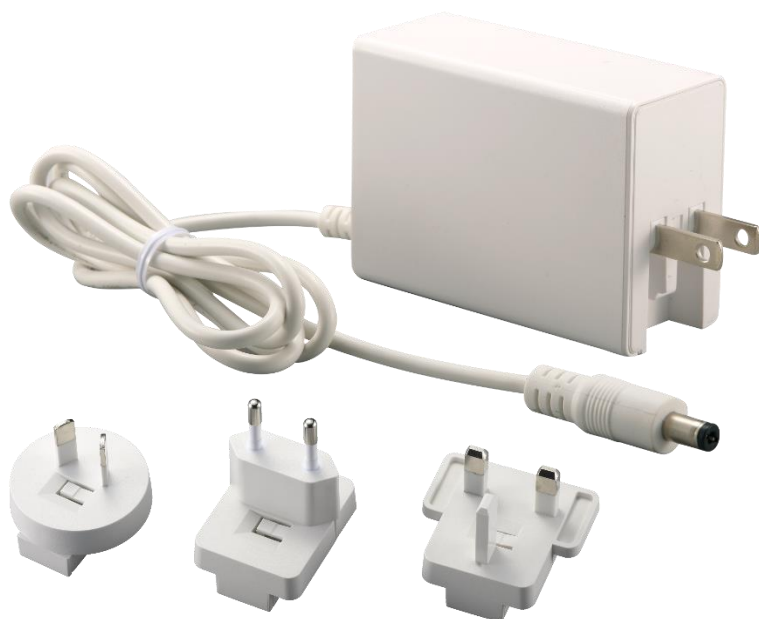

Model	Voltage	Max. Load	Max. Power	Standard DC Plug
ATM 065A4-W120_	12.0 V	5.00 A	60 W	2.1 x 5.5 x 9.5 mm
ATM 065A4-W150_	15.0 V	4.34 A	65 W	2.1 x 5.5 x 9.5 mm
ATM 065A4-W190_	19.0 V	3.43 A	65 W	2.1 x 5.5 x 9.5 mm
ATM 065A4-W240_	24.0 V	2.71 A	65 W	2.1 x 5.5 x 9.5 mm
ATM 065A4-W480_	48.0 V	1.36 A	65 W	2.1 x 5.5 x 9.5 mm

Input

Voltage	100-240 VAC
Line Frequency	50-60 Hz
Current	1.6 A – 0.7 A
Protection	Internal Primary Current Fuse
Configuration	U: US Plug / Changeable Plug V: Changeable Plug

Output

Load Regulation	± 5 % (Typical)
Ripple & Noise	≤ 1 % V p-p at full load
Transient Response	0.5 ms at 50 % load change
Start-Up Time	< 3 s
Hold-Up Time	≥ 10 ms at full load
Rise Time	< 50 ms
Protection	Short Circuit Protection Over Voltage Protection Over Current Protection Over Temperature Protection

Electrical

Topology	Switching Flyback
Dielectric Withstand	4000 V AC Primary – Secondary
Touch/Leakage Current	< 100 µA
Efficiency	Meets DOE Level VI, ErP Stage 2

Compliance

Means of Protection	2x MOPP
Safety	IEC EN 60601-1 · UL · PSE
EMC Standards	IEC 60601-1-2 (Ed. 4.1) EN 55011; EN 61000-3-2, -3-3 EN 61000-4-2, -3, -4, -5, -6, -8, -11
MTBF	300 000 Hours at 25 °C

Environmental

Operating Temperature	-20 °C – 40 °C
Storage Temperature	-20 °C – 80 °C
Operating Altitude	< 5000 m
Operating Humidity	20 % RH – 80 % RH
Storage Humidity	10 % RH – 90 % RH
Cooling	Convection Cooling

Mechanical

Case Dimensions	53.5 × 31.5 × 74.5 mm
Weight (ref.)	195 g

Distributed by: