



SUNPOWER TECHNOLOGY CORP.
16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).
TEL: 886-2-8226-3100 FAX: 886-2-8226-3111
http://www.sunpower.com.tw
E-mail: sunpower@sunpower.com.tw

SPS-G050-IDx Series

50W, Dual Output



99 x 82 x 35 mm

3.90 x 3.23 x 1.38 inch



Features:


- * V1 & V2 output are isolated , ID8&ID9 V2 polarity option (+ or -)
- * Power ON with LED indicator
- * Built in EMI filter, low ripple noise
- * Over voltage protection : Shutdown and latch off
- * Over load & short circuit protection : Hiccup mode
- * 100% full load burn-in test
- * -20℃~70℃ Operating temperature
- * UL, cUL, TUV, CB, CE approved
- * 3 years warranty

Specification:


INPUT	Voltage	88V ~ 264VAC universal full range or 125V ~ 375VDC.							
	Frequency	47 ----- 63 Hz							
	Current	<1.3A@100V AC input, full load condition							
	Inrush Current (TYP.)	30A@115V , 50A@230V AC input, Cold start at 25℃ ambient							
	Leakage Current	<0.75mA@264V AC input							
OUTPUT	MODEL No.	SPS-G050-ID1		SPS-G050-ID2		SPS-G050-ID8		SPS-G050-ID9	
	Output	V1	V2	V1	V2	V1	V2	V1	V2
	Voltage	5V	12V	5V	24V	12V	±12V	15V	±15V
	Min Load	0.5A	0A	0.5A	0A	0.3A	0A	0.3A	0A
	Max Load	6A	3A	6A	2A	4.2A	2.1A	3.4A	2A
	Output Tolerance ②	± 3%	± 5%	± 3%	± 5%	± 2%	± 5%	± 2%	± 5%
	Ripple Noise MAX. ③	70mV	120mV	70mV	200mV	120mV	120mV	150mV	150mV
	Efficiency (TYP.)	79%		79%		82%		83%	
PROTECTION	Output MAX.	51W		52W		50W		51W	
	Over Voltage	5.8 ~ 7.0V	-----	5.8 ~ 7.0V	-----	13.8~16.8V	-----	17.3~21.0V	-----
		Shutdown and latch off, recover after re-start up.							
ELEC. CHAR.	Over Load & Short Circuit	When power supply over 105%~ 150% max load or short circuit acted, power supply will go into hiccup mode and recover automatically after the fault is removed.							
	Rise time	<30mS							
	Hold up time	>60mS@230V, full load condition							
ENVIRONMENT	Setup time	<1 Sec@100 ~ 240V AC							
	Temperature ④	Operating: -20 ~ +70℃ ; De-rating: 50 ~ 70℃: 2.5%/℃ ; Storage: -40 ~ +85℃							
	Humidity	Operating: 20% ~ 90% RH (non condensing) ; Storage: 10% ~ 95% RH (non condensing)							
SAFETY	Altitude	6562 ft (≒ 2000 m) operating							
	Withstand voltage	I/P-O/P:3KVAC, I/P-FG:1.8KVAC, O/P-FG:0.5KVAC, 1minute							
	Isolation resistance	I/P-O/P, I/P-FG, O/P-FG > 100MΩ/500VDC at 25℃/ 70% RH							
EMC	Safety standard	UL 62368-1 2 nd Edition, 2014-12-01, CAN/CSA C22.2 No. 62368-1-14, 2 nd Edition, 2014-12, TUV EN 62368-1:2014+A11, IEC 62368-1:2014 approved							
	EMI	EN / BS EN 55032 CLASS B, FCC CFR 47 PART 15 CLASS B							
	EMS	Compliance to EN / BS EN 61000-3-2 CLASS A, EN / BS EN 61000-3-3							
OTHERS		EN / BS EN 55035 : 2017 EN / BS EN 61000-4-2,3,4,5,6,8,11							
	Cooling	Natural cooling.							
	M.T.B.F.	299K hours							
	Terminal pitch	7P / 8.25mm with plastic cover, 90 deg terminal optional (with MOQ)							
NOTE	Packing	N.W.: 0.39Kg / pc ; 46pcs / 1.22 CUFT / 1 CTN							
	①	All measurements which not mentioned are based on 230VAC input, output Max at ambient 25℃ / 70%RH							
	②	Output tolerance included set up voltage, line regulation and load regulation. The regulation is measured between 20%~80% max load of each output, Total output must under output Max .							
	③	Ripple & noise are measured at 100~254VAC input with 10~50℃ condition and 20MHz of bandwidth by using a 10" ~ 15" twisted pair-wire terminated with a 0.1uF & a 47uF parallel capacitor.							
	④	The operating temperature shall follow the de-rating curve in spec The output load may be requested for decreasing as de-rating curve in spec when low input voltage is under 100VAC.							
	⑤	The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.							

SPS-G050-IDx Series


Block Diagram : UD5-1

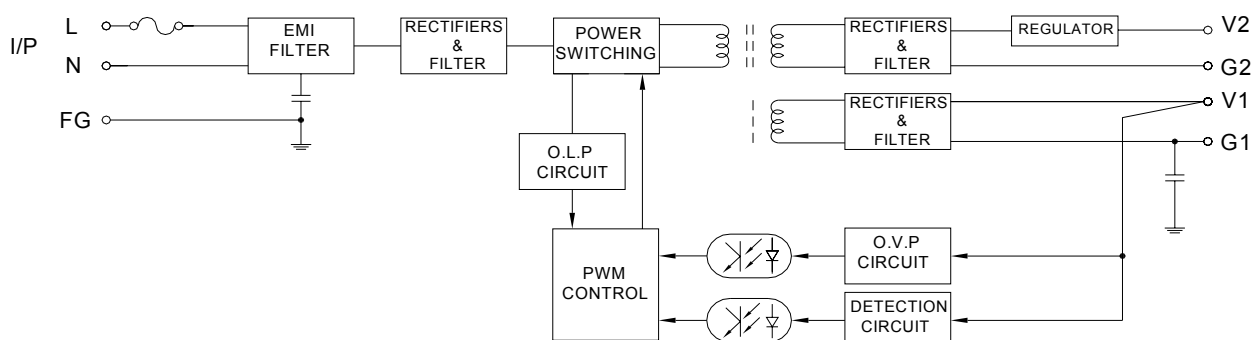

De-rating Curve :

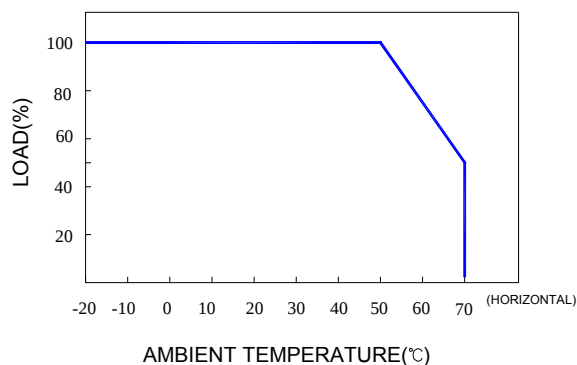


Output De-rating Vs Input Voltage :

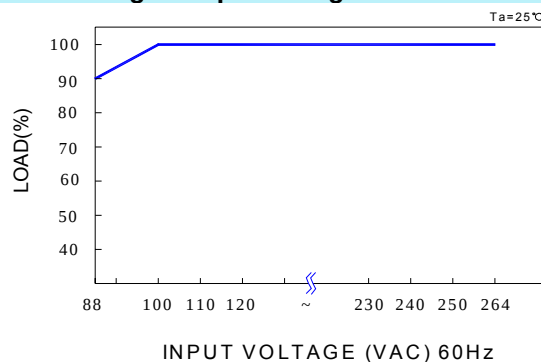

Dimension:

(Unit: mm)

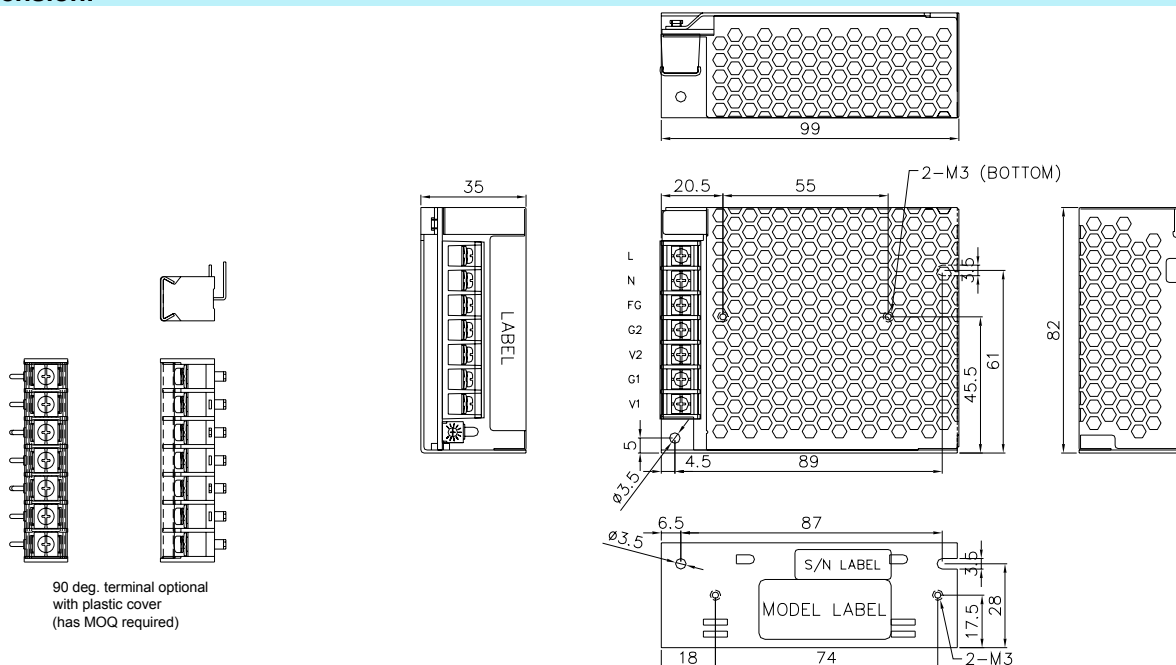

Terminal Pin. No Assignment :

7P, PITCH 8.25mm WITH PC COVER							
MODEL No.	1	2	3	4	5	6	7
SPS-G050-IDx	L	N	FG	G2	V2	G1	V1