

Features

- Gallium Nitride (GaN FET) Based Design
- High Power Density (+ 250 %)*
- 200 kHz Switching Frequency
- Efficiency up to 95 %
- No Load Power Consumption < 0.15 W
- Regulated Output with Low Ripple Noise
- 1 Year Warranty



Marks / Approvals



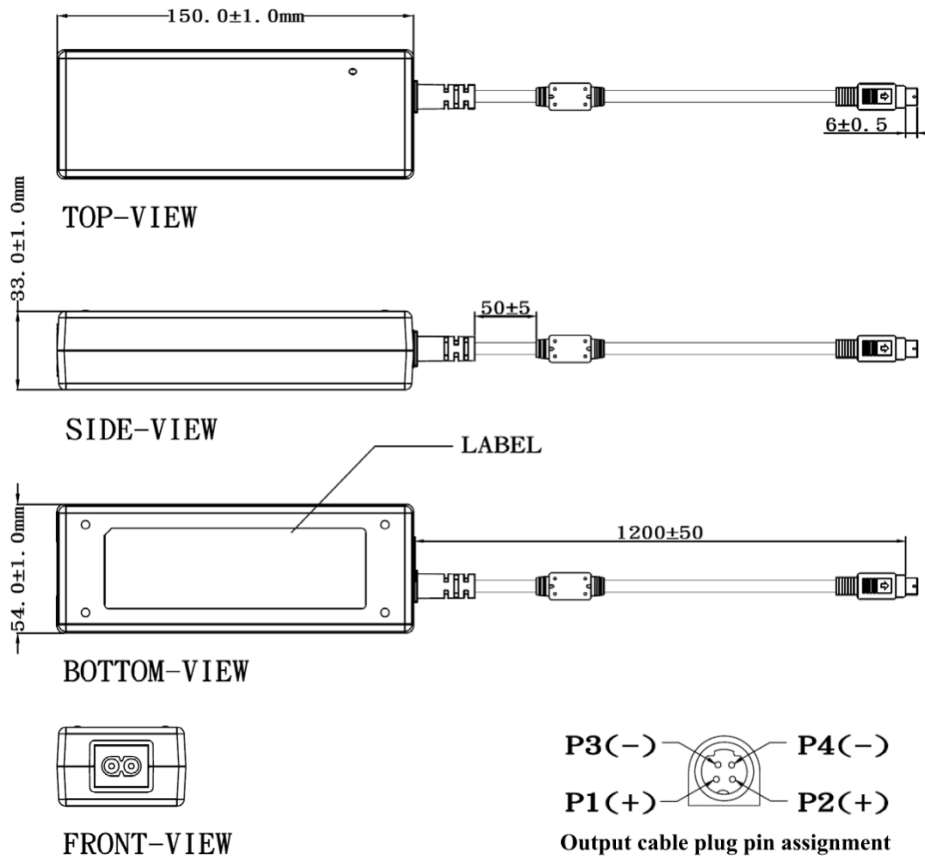
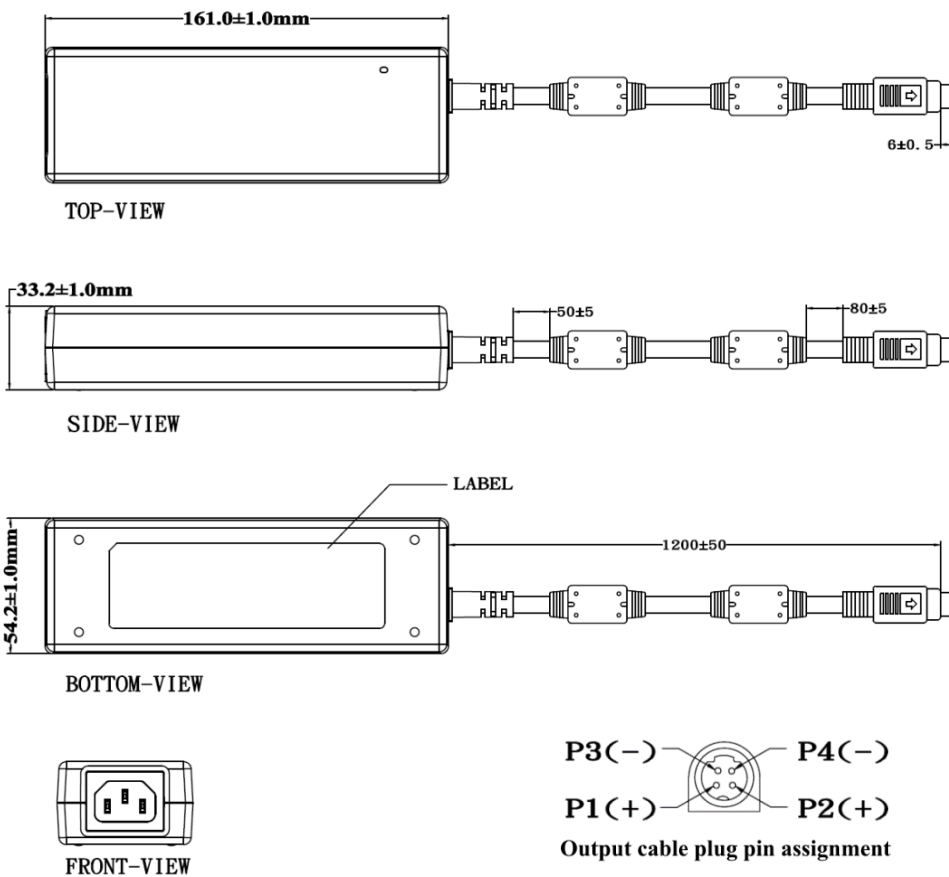
Product similar to photo, variations possible. Photo shows variant type A with C8 AC inlet.
Refer to technical drawing for detailed specifications

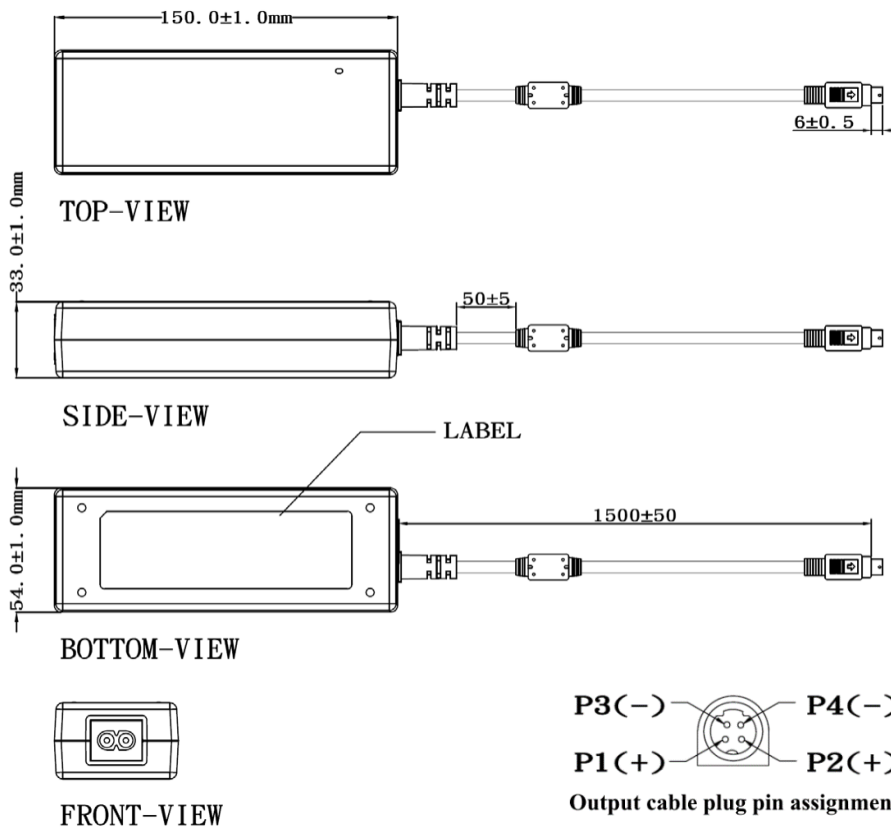
Specifications

	MODEL	Voltage	Min. Load	Max. Load	Max. Power
	ATS 200TS-□120	12 V	0.00 A	16.0 A	192 W
	ATS 200TS-□180	18 V	0.00 A	11.1 A	200 W
	ATS 200TS-□190	19 V	0.00 A	10.5 A	200 W
	ATS 200TS-□191	19.5 V	0.00 A	10.2 A	200 W
	ATS 200TS-□200	20 V	0.00 A	10.0 A	200 W
	ATS 200TS-□240	24 V	0.00 A	8.3 A	200 W
	ATS 200TS-□480	48 V	0.00 A	4.2 A	200 W
	ATS 200TS-□560	56 V	0.00 A	3.6 A	200 W
	□ – A: IEC 60320 C8 AC Inlet; P: IEC 60320 C14 or C6 Inlet				
INPUT	Voltage	AC 100 V – 240 V			
	Frequency	50 Hz - 60 Hz			
	Current	2.4 A max.			
	Protection	Internal Primary Current Fuse, Inrush Limiting			
OUTPUT	Load Regulation	± 5 % (typical)			
	Ripple & Noise	1 % – 2 % V p-p max. for output voltage at full load			
	Transient Response	0.5 ms for 50 % load change typical			
	Leakage Curre1nt	0.25 mA max.			
	Protection	Short Circuit Protection ▪ Over Voltage Protection Over Current Protection ▪ Over Temperature Protection			
OTHERS	Cooling	Convection			
	Efficiency	DoE Level VI ▪ Energy Star ▪ ErP Stage 2 ▪ NRCan & GEMS Level VI Certified			
	Holdup Time	10 ms at full load			
	Dielectric Withstand	AC 3000 V Primary – Secondary			
	MTBF	300,000 calculated hours at 25 °C by Telcordia SR-332			
ENVIRONMENT	Temperature	Operating: 0 °C – 40 °C / Storage: -20 °C – 80 °C			
	Humidity	Operating: 20 % RH – 80 % RH / Storage: 10 % RH – 90 % RH			
CONNECTION	Input	IEC 60320 C14 or C6 input connector (Protection Class I) IEC 60320 C8 AC input connector (Protection Class II)			
	Output	Standard DC Cable Type: Black UL2095 16 AWG * 4C; Plug: 4 Pin DIN Cable Length: 1200 mm. Other configurations available upon request			
EMI Conduction & Radiation	Compliance to EN 55032, EN 55024				
Harmonic Current	Compliance to EN 61000-3-2, -3				
EMS Immunity	Compliance to IEC 61000-1-2, -3, -4, -5, -6, -8, -11				
Safety	IEC / EN / UL 62368-1 ▪ IEC 60950-1 ▪ CE ▪ PSE ▪ BSMI				
Case Dimensions	C6/C14: 161 mm x 54 mm x 33 mm				
	C8: 150 mm x 54 mm x 33 mm				
Weight	560 g (typ.)				

* Power Density 250 % higher than traditional adapter (12.5 W/in³ compared to 5.3 W/in³)

Specifications subject to change without notice

A120 Variant (C8 AC Inlet)**P120 Variant (C14 AC Inlet)**

A Variant (C8 AC Inlet) – All models except A120**P Variant (C14 AC Inlet) – All models except P120**