

MPU64 series

V1.9

The MPU64 series of AC/DC switching mode power supplies provide 63 Watts of continuous output power. All models meet FCC Part-18, CISPR-11 and EN55011 class B emission Limits, IEC 60601-1-2 and are designed to comply with UL/cUL, TUV T-mark and conformity assessment in CE marking. All units pass burn-in test at full load condition.



APPROVALS:



Electrical Characteristics:


Characteristic	Condition	Min.	Typ.	Max.	Unit
Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Input Operate Voltage Range	Detail to See Fig.1 (Derate Linearly from 100% Load at 90VAC to 80% Load at 80VAC)	80		275	VAC
Input Frequency	Sine Wave	47		63	Hz
Output Power Range	See Rating Chart			63	W
Low Line Input Current	Full Load, Vin=100VAC		1.62		A
High Line Input Current	Full Load, Vin=240VAC		0.72		A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=100VAC			45	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=240VAC			108	A
Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz		0.1	0.13	mA
Efficiency	Full Load, Vin=230VAC, Detail to See Rating Chart	See Rating Chart			
Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC			1	%
Over Voltage Protection		112		132	%
Over Load Protection	Recovers Automatically After Fault Condition is Removed	110		150	%
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=110VAC	See Rating Chart			
Start-up time	Full Load, Vin=100~240VAC			2	s
Insulation Resistance		50			MΩ
Temperature Coefficient	All Condition			±0.04	%/°C
Dielectric Withstanding Voltage (P-S)	Primary to Secondary, Limit Current <10mA			4000	VAC
Dielectric Withstanding Voltage (P-G)	Primary to PE, Limit Current <10mA			1500	VAC
EMC Emission	Compliance to EN55011 (CISPR11), EN60601-1-2	B			Class

Environmental:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Detail to see Fig.2 (Derate linearly from 100% load at 50°C to 50% load at 70°C) (MPU64-102~104 100% load at 40°C to 40% load at 70°C)	-10		70	°C
Storage Temperature	10 ~ 95% RH	-40		85	°C
Operating Humidity	Non-Condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			15	kV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			8	kV
Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	200k			h
Operating Altitude (Elevation)	All Condition			3000	m
Vibration	10 ~ 500Hz, 10min./1cycle, 60min. Each Along X, Y, Z Axes			5	G
Surge Voltage	Line-Neutral			1	kV
Surge Voltage	Line-PE & Neutral-PE			2	kV

FEATURES:

- * Wide Operating Voltage, 80 to 275 VAC, 47 to 63 Hz
- * IEC-320-C14 Input Inlet
- * Single Output
- * Crowbar Mode Over Voltage Protection
- * Input to Output: 2MOPP
- * High ESD Immunity
- * Efficiency Level V (MPU64-105~110)
- * Class I System
- * 5-Year Warranty



APPLICATIONS:

- * Medical Equipment
- * Patient Monitor
- * Ultrasound System
- * Blood Chemistry Analyzer
- * Medical Image

GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Protection Classes:** Class I
- * **Safety:** IEC 60601-1 Edition 3.1, IEC 60601-1 Edition 3.2, ANSI/AAMI ES60601-1, CSA-C22.2 NO.60601-1, EN60601-1

MPU64 series



V1.9

63W External Medical Grade Power Supply


SPECIFICATION NOTE :

- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
- The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

MECHANICAL DIMENSIONS: (UNIT: mm [inch])

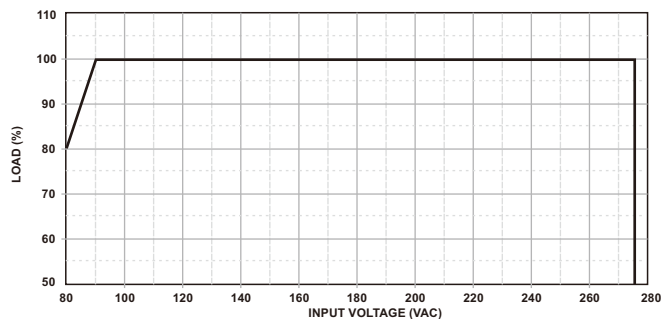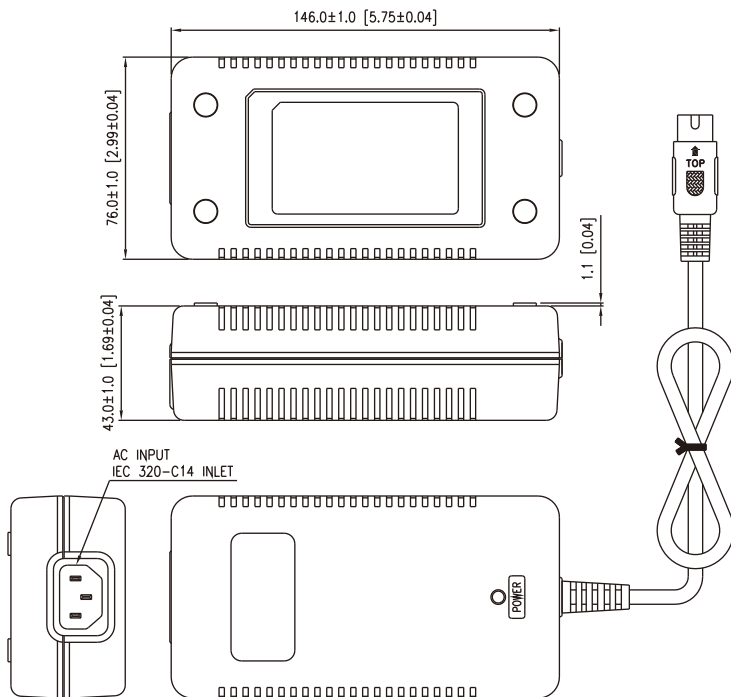

(FIG.1) INPUT VOLTAGE DERATING CURVE

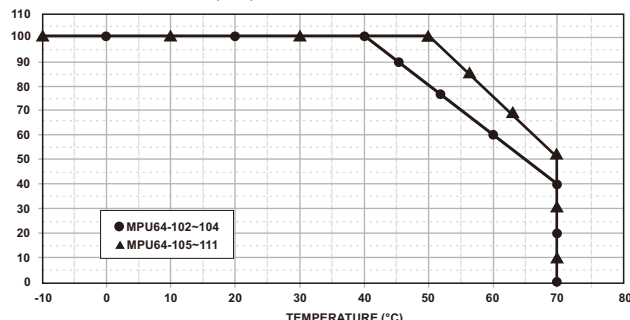

(FIG.2) TEMPERATURE DERATING CURVE

OUTPUT CABLE RECOMMEND :

- MPU64-102~103 are required to use AWG#16/5C/4FT output cable.
- MPU64-104~107 are required to use AWG#16/2C/4FT output cable.
- MPU64-108~110 are required to use AWG#18/2C/4FT output cable.
- The regulation and efficiency will be changed by modified output cable.

NET WEIGHT: 510~560g approx.

Rating Chart:

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)	Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
	(VDC)	(A)							
*MPU64-102	5.0	9.00	45	50	± 7	76	0.5	16	Hiccup
*MPU64-103	7.0	7.85	55	70	± 7	76	0.5	16	Hiccup
*MPU64-104	9.0	6.44	58	90	± 5	79	0.5	16	Hiccup
MPU64-105	12.0	5.25	63	100	± 5	87	0.5	16	Hiccup
MPU64-106	15.0	4.20	63	100	± 5	87	0.5	16	Hiccup
MPU64-107	18.0	3.50	63	100	± 5	87	0.5	16	Hiccup
MPU64-108	24.0	2.62	63	100	± 3	87	0.5	16	Hiccup
*MPU64-109	30.0	2.10	63	100	± 3	87	0.5	16	Hiccup
*MPU64-110	36.0	1.75	63	100	± 3	87	0.5	16	Hiccup

MPU64-102~104 are not in compliance with CEC V.

[*] = MOQ is required. Please contact sales.


EMC Specifications:

EMISSION		
ITEM	STANDARD	RESULT
Conducted	EN55011	CLASS B
Radiated	EN55011	CLASS B
Harmonics	EN61000-3-2	CLASS A
Flicker	EN61000-3-3	PASS

	ITEM	STANDARD	RESULT	CRITERION
IMMUNITY	ESD	EN61000-4-2	15KV air discharge, 8KV contact discharge	A
	RS	EN61000-4-3	PASS	A
	EFT	EN61000-4-4	2KV	A
	SURGE	EN61000-4-5	1KV line to line, 2KV line to ground	A
	CS	EN61000-4-6	3Vrms, 6Vrms	A
	PFMF	EN61000-4-8	PASS	A
	Voltage dips	EN61000-4-11	i) 0% reduction for 0.5 cycle at 50Hz	B
			ii) 0% reduction for 1 cycle at 50Hz	B
			iii) 70% reduction for 25/30 cycles at 50/60Hz	C (240VAC)
	Voltage interruptions	EN61000-4-11	0% reduction for 250/300 cycles at 50/60Hz	C


STANDARD PACKAGING : (UNIT: mm)

- * Power Supplies per Box (full box): 25 pcs
- * Box Dimensions: L52*W52*H22 cm
- * Gross Weight (full box): 14.97 KGS
- * Packaging Part No: 84-03806-01

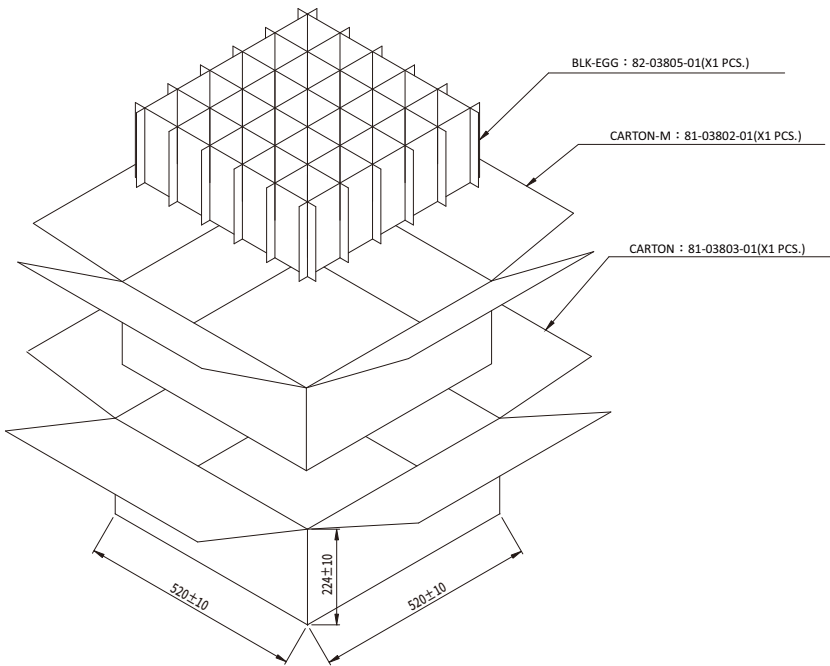


* Note the above packing is for reference only,
please contact sales for a confirm packing information.

Standard Connector:

Barrel Female Plug	Plug PN	Standard Connection(Default)	Wire Material	Wire Type
	P05B	P1,P2,P4=RTN P3,P5=OUT SHIELD=GND	UL2464	102~103:16AWG*5C/4FT 104~107:16AWG/4FT 108~110:18AWG/4FT

Optional Connector:

Barrel Female Plug	Plug PN	OD	ID	L	Standard Connection(Default)	Wire Material	Wire Type
	P01J	5.5	2.1	9.5	Center=OUT(+) Sleeve=RTN(-)	UL2464 SPT-1 SPT-2	104~107:16AWG/4FT 108~110:18AWG/4FT
	P01K	5.5	2.1	11			
	P01M	5.5	2.5	9.5			
	P01N	5.5	2.5	11			

* Optional output connectors available contact sales for details.