



SUNPOWER TECHNOLOGY CORP.  
 16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).  
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111  
 http://www.sunpower.com.tw  
 E-mail: sunpower@sunpower.com.tw

# SPS-100 -xx Series

## SPS-100P-xx Series

100W, Single Output  
 Green mode function



198 x 95 x 38 mm  
 7.80 x 3.74 x 1.50 inch

### Features:

- \* Green-mode design, no load < 1W
- \* Power ON with LED indicator
- \* Built-in EMI filter, low ripple noise
- \* Over voltage , over load & short circuit protection
- \* Output voltage  $\pm 10\%$  adjustment
- \* 100% full load burn-in test
- \*  $-20^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  operating temperature
- \* UL, cUL, TUV, CB, CE approved
- \* 3 years warranty

### Specification:

INPUT	Voltage	88V ~ 264VAC universal full range or 125V ~ 375VDC.						
	Frequency	47 ---- 63 Hz						
	Current	<2.8A @100V AC input, full load condition						
	Inrush Current (TYP.)	35A@115V , 70A@230V AC input. Cold start at 25°C ambient						
	Leakage Current	<1.0mA@264V AC input						
OUTPUT	MODEL No.	SPS-100 -3.3 SPS-100P-3.3	SPS-100 -05 SPS-100P-05	SPS-100 -12 SPS-100P-12	SPS-100 -15 SPS-100P-15	SPS-100 -24 SPS-100P-24	SPS-100 -30 SPS-100P-30	SPS-100 -48 SPS-100P-48
	Voltage	3.3V	5V	12V	15V	24V	30V	48V
	Min Load	0A	0A	0A	0A	0A	0A	0A
	Max Load	23A	20A	8.5A	7A	4.3A	3.5A	2.3A
	Output Tolerance ②	$\pm 3\%$	$\pm 2\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$
	Ripple Noise MAX. ③	70mV	70mV	120mV	150mV	240mV	240mV	250mV
	Efficiency (TYP.)	74%	78%	83%	84%	84%	85%	86%
	Output MAX.	76W	100W	102W	105W	103W	105W	110W
PROTECTION	Over Voltage	3.8~4.6V	5.8~7.0V	13.8~16.8V	17.3~21.0V	27.6~33.6V	34.5~42.0V	55.2~67.2V
	Over Load & Short Circuit	Shutdown and latch off, recover after re-start up. When power supply over 105%~ 150% max load or short circuit acted, power supply will go into hiccup mode and recover automatically after the fault is removed.						
ELEC. CHAR.	Rise time	<20mS						
	Hold up time	>60mS@230V, full load condition						
	Setup time	<1 Sec@100 ~ 240V AC						
ENVIRONMENT	Green mode function	Power consumption at no load < 1W at 240VAC input						
	Temperature ④	Operating: $-20 \sim 70^{\circ}\text{C}$ ; De-rating: $45 \sim 70^{\circ}\text{C}$ : 2.5%/°C ; Storage: $-40 \sim +85^{\circ}\text{C}$						
	Humidity	Operating: 20% ~ 90% RH (non condensing) ; Storage: 10% ~ 95% RH (non condensing)						
SAFETY	Altitude	6562 ft ( $\approx$ 2000 m) operating						
	Withstand voltage	I/P-O/P:3KVAC, I/P-PE:1.5KVAC, O/P-PE:0.5KVAC, 1minute						
	Isolation resistance	I/P-O/P, I/P-PE, O/P-PE > 100M $\Omega$ /500VDC at 25°C/ 70% RH						
EMC	Safety standard	UL 60950-1 2 <sup>nd</sup> , CSA C22.2 No. 60950-1-07 2 <sup>nd</sup> , TUV EN 60950-1:2006+A11+A1+A12+A2, IEC 60950-1:2005+A1+A2, approved						
	EMI	EN 55022 CLASS B , FCC CFR 47 PART 15 CLASS B , CNS 13438 CLASS B. Compliance to EN61000-3-2 CLASS A, EN61000-3-3, SPS-100P-xx models are built-in PFC choke to lower 25% THD (Total Harmonic Distortion) performance,						
	EMS	EN 55024 : EN 61000-4-2,3,4,5,6,8,11						
OTHERS	Cooling	Natural cooling.						
	M.T.B.F.	271K hours						
	Terminal pitch	7P / 9.5mm with plastic cover, 90 deg terminal optional (with MOQ)						
NOTE	Packing	N.W.:0.72Kg / 1pc; 24pcs / 1.22 CUFT / 1 CTN						
	①	All measurements which not mentioned are based on 230VAC input, <b>output Max</b> at ambient 25°C / 70%RH						
	②	Output tolerance included set up voltage, line regulation and load regulation.						
③	Ripple & noise are measured at 100~254VAC input with 10~50°C condition and 20MHz of bandwidth by using a 10" ~15" twisted pair-wire terminated with a 0.1uF & a 47uF parallel capacitor.							
④	The operating temperature shall follow the de-rating curve in spec							
⑤	The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.							




**SUNPOWER TECHNOLOGY CORP.**  
 16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).  
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111  
 http://www.sunpower.com.tw  
 E-mail: sunpower@sunpower.com.tw

# SPS-100 -xx Series


## SPS-100P-xx Series

### Block Diagram : US3

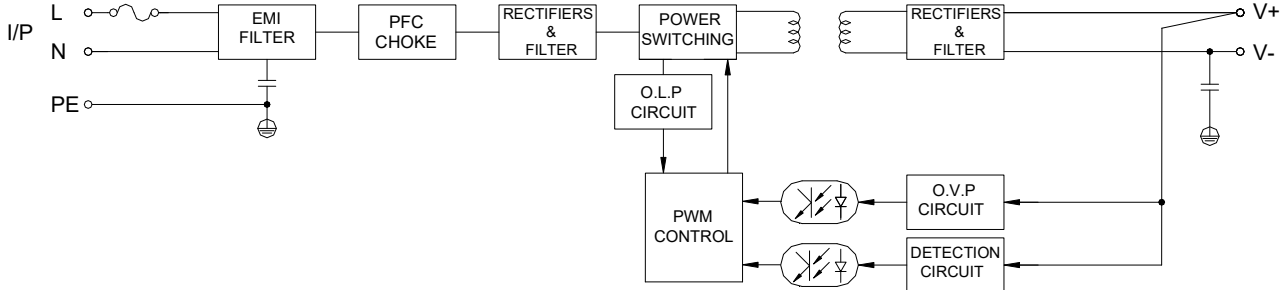


### SPS-100 -xx series without PFC choke

### De-rating Curve :

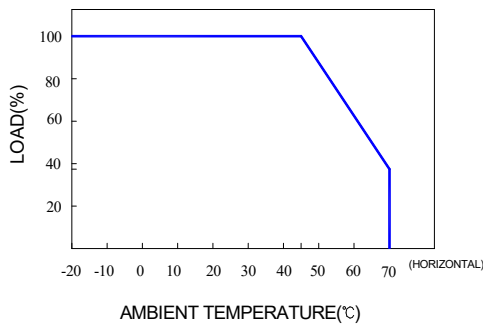


### Output De-rating Vs Input Voltage :

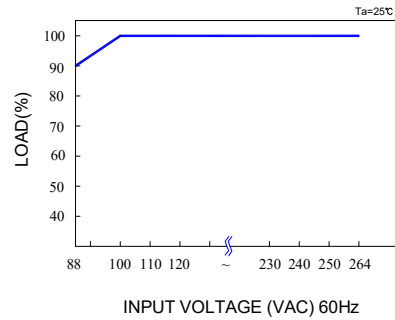

### Dimension:

(Unit: mm)

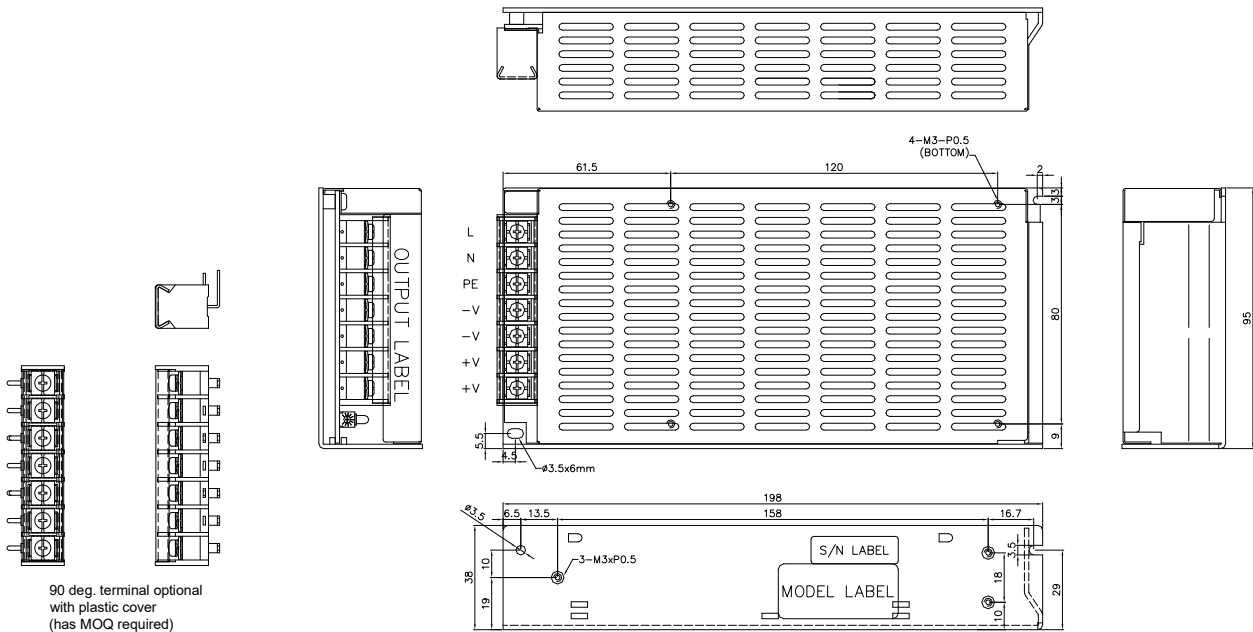

90 deg. terminal optional with plastic cover (has MOQ required)

### NOTES:

TERMINAL BLOCK: 7P, PITCH 9.5mm WITH PC COVER

MODEL No.	1	2	3	4	5	6	7
SPS-100(P)-xx	L	N	PE	-V	-V	+V	+V