

**SUNPOWER TECHNOLOGY CORP.**

16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).

TEL: 886-2-8226-3100

FAX: 886-2-8226-3111

http://www.sunpower.com.tw

E-mail: sunpower@sunpower.com.tw



275x125x63 mm

10.83 x 4.92 x 2.48 inch




SPS-750P-xx Series

750W, Single Output**Active P.F.C Function****Features:**


- * Universal AC input with active power factor correction, P.F.>0.95
- * High reliability and high efficiency up to 90%
- * Altitude during operation up to 13124ft (\approx 4000m)
- * Constant current design suits for inductive load and capacitive load.
- * Inrush current limit soft start function
- * Over voltage · over load & short circuit · over temperature protection
- * Output voltage $\pm 10\%$ adjustment
- * Output voltage remote sense & Remote Control ON/OFF
- * With power good signal output
- * Current sharing function, 2+1 up to 2250W
- * Built-in 12V/0.1A auxiliary output
- * UL, cUL, TUV, CB, CE approved
- * 3 years warranty

Specification:


INPUT	Voltage	90V ~ 264VAC universal full range or 127V ~ 375VDC.						
	Frequency	47 ~ 63 Hz						
	Current	<9.8A@100VAC input, full load condition						
	Inrush Current (TYP.)	50A@115V , 90A@230V AC input, Cold start at 25°C ambient						
	Leakage Current	<1.5mA@264V AC input						
	Power Factor	PF > 0.95						
OUTPUT	MODEL No.	SPS-750P-05	SPS-750P-12	SPS-750P-15	SPS-750P-24	SPS-750P-30	SPS-750P-36	SPS-750P-48
	Voltage	5V	12V	15V	24V	30V	36V	48V
	Min Load	0A	0A	0A	0A	0A	0A	0A
	Max Load	120A	62.5A	50A	31.3A	25A	21A	15.8A
	Output Tolerance ②	$\pm 2\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$	$\pm 1\%$
	Ripple Noise MAX. ③	120mV	120mV	120mV	200mV	200mV	220mV	240mV
	Efficiency (TYP.)	80%	88%	88%	88%	89%	89%	90%
	Output MAX.	600W	750W	750W	751W	750W	756W	758W
PROTECTION	Over Voltage	5.8~7.0V	13.8~16.8V	17.3~21.0V	27.6 ~ 33.6V	34.5~42.0V	41.4~50.4V	55.2~67.2V
		Shutdown and latch off, recover after re-start up.						
	OverLoad & ShortCircuit	When power supply over 105%~ 135% max load or short circuit acted, power supply will be shutdown and recover automatically after the fault is removed.						
	Over Temperature	Over 95°C \pm 5°C Shutdown, recovers automatically after fault condition has been removed.						
ELEC. CHAR.	Rise time	<40mS						
	Hold up time	$\geq 16mS@230V$, full load condition						
	Setup time	<2.0S@230V AC						
	Remote Control	Please see the application manual						
	Remote sensing	(RS+, RS-).						
	Power good signal	High level TTL signal release, Please see the application manual						
ENVIRONMENT	Auxiliary power	12V / 0.1A (Only for remote control ON/OFF)						
	Temperature ④	Operating: -20 ~ +70°C ; De-rating: 50 ~ 70°C : 2.5%/°C ; Storage: -40 ~ +85°C						
	Humidity	Operating: 20% ~ 90% RH (non condensing) ; Storage: 10% ~ 95% RH (non condensing)						
	Altitude	13124ft (\approx 4000m) operating						
SAFETY	Withstand voltage	I/P-O/P:3KVAC, I/P-PE:1.5KVAC, O/P-PE:0.5KVAC, 1minute						
	Isolation resistance	I/P-O/P, I/P-PE, O/P-PE > 100M Ω /500VDC at 25°C / 70% RH						
	Safety standard	UL 60950-1 2 nd , CSA C22.2 No. 60950-1-07 2 nd , TUV EN 60950-1:2006+A11+A1+A2+A2, IEC 60950-1:2005+A1+A2, approved						
EMC	EMI	EN 55022 CLASS B · FCC 47 CFR PART 15 CLASS B						
	EMS	Compliance to EN61000-3-2 CLASS D, EN61000-3-3						
OTHERS	Cooling	Forced airflow cooling with DC fan.						
	M.T.B.F.	107 K hours						
	Dimension	275x125x63 mm (L*W*H)						
	Packing	N.W.:2.5 Kg / 1pc; 3pcs / 1.22 CUFT / 1 CTN						
NOTE	①	All measurements which not mentioned are based on 230VAC input, output Max at ambient 25°C / 70%RH						
	②	Output tolerance included set up voltage, line regulation and load regulation.						
	③	Ripple & noise are measured at 10~50°C condition and 20MHz of bandwidth by using a 10" ~15" twisted pair-wire terminated with a 0.1uF & a 47uF parallel capacitor.						
	④	The operating temperature shall follow the de-rating curve in spec						
	⑤	The output load may be requested for decreasing as de-rating curve in spec when low input voltage is under 100VAC..						
	⑥	The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.						
	⑦	The ambient temperature should be de-rating by 5°C/1000m, when operating altitude higher than 2000m (6500 ft)						




Block Diagram : PS9

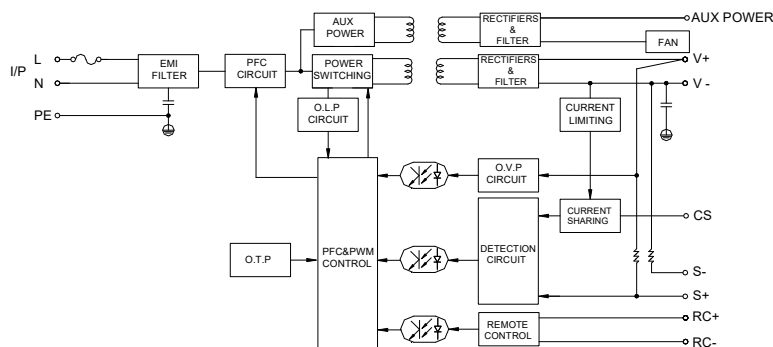

Output De-rating Vs Input Voltage :

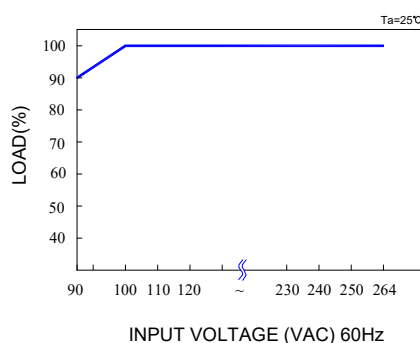

(Unit: mm)

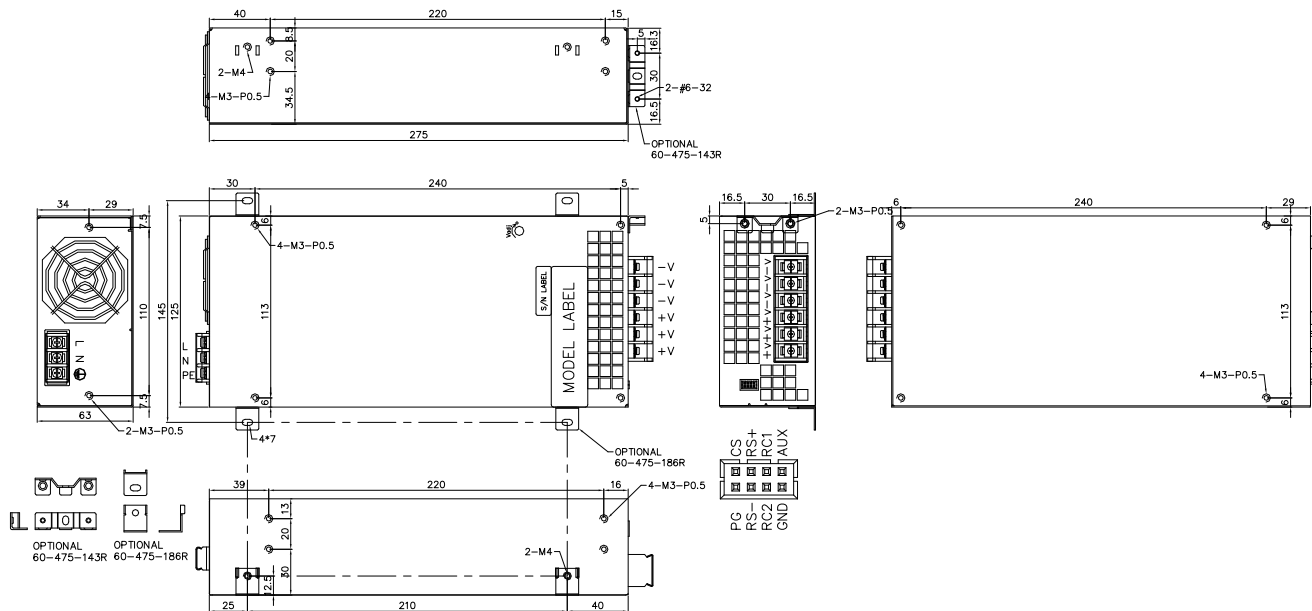

CN11 O/P 6P, PITCH 11mm

1	2	3	4	5	6
+V	+V	+V	-V	-V	-V

Pin No.	1	2	3	4	5	6	7	8	Crimping Socket	Crimping Contact for Socket
Assignme	CS	PG	RS+	RS-	RC1	RC2	AUX	GND	HRS DF11-8DS-2C or equivalent	HRS DF11-EP22SCB or equivalent

SPS-750P-xx Series


Application Manual

Current sharing with remote sensing:

- 1 Parallel operation is available by RS+ and RS- are connected mutually in parallel.
- 2 Difference of output voltages among parallel units should be less than 100 mV.
- 3 In parallel operation 3 units is the maximum, please consult the manufacturer for applications of more connecting in parallel.
- 4 The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- 5 Each output could work within **max load** but must under total **output Max.**

$$(\text{Total output Max. at parallel operating}) = (\text{max load per units}) \times (\text{Number of units}) \times 0.9$$
- 6 In parallel connection, maybe only one unit (master) operate if the total **output Max.** is less than 10% of **max load** condition.

The other PSUs (slaves) may go into standby mode and their output LEDs will not turn on.

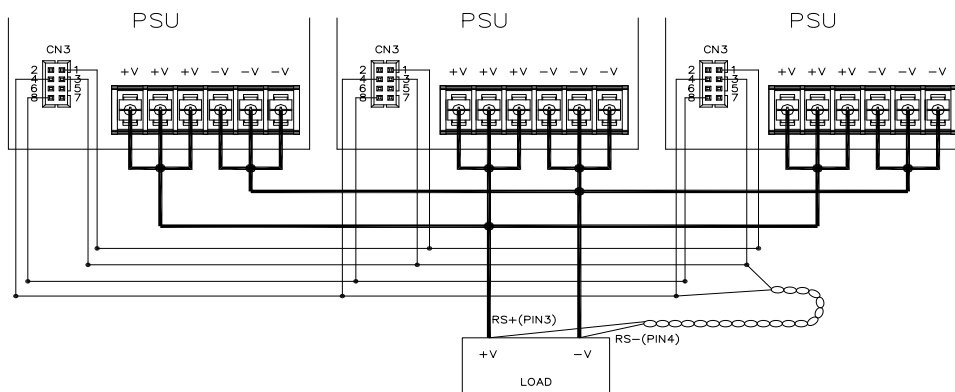


Remote control ON/OFF:

- 1 Remote control ON/OFF becomes available by applying voltage in CN3
- 2 Table A shows the specification of remote control ON/OFF function
- 3 Fig 1 slows the example to connect remote control ON/OFF function

Table A : Specification of remote control ON/OFF

Connection Method		Fig 1-A	Fig 1-B	Fig 1-C
SW Logic	Output ON	SW Open	SW Close	SW Open
	Output OFF	SW Close	SW Open	SW Close

Fig 1 Examples of connecting remote control ON/OFF

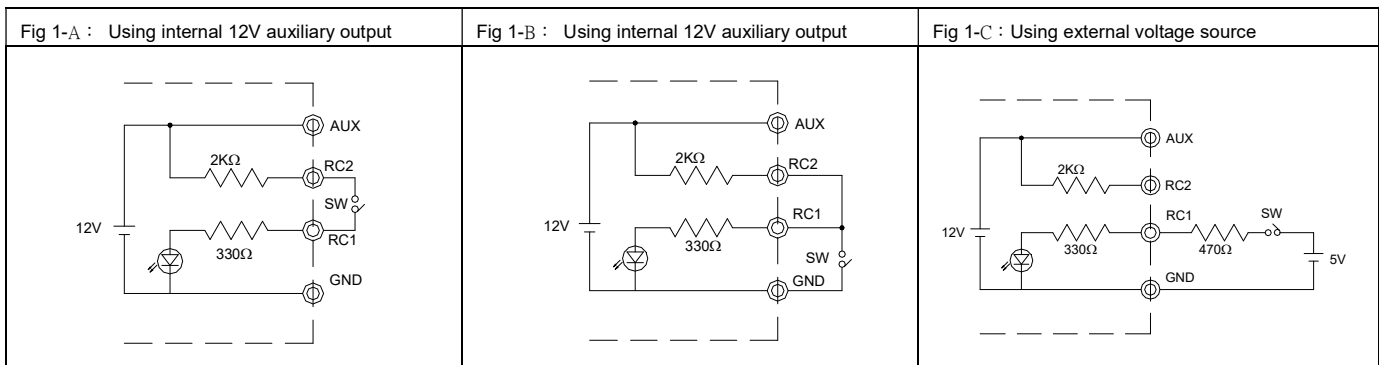



SUNPOWER TECHNOLOGY CORP.
16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).
TEL: 886-2-8226-3100 FAX: 886-2-8226-3111
<http://www.sunpower.com.tw>
E-mail: sunpower@sunpower.com.tw

SPS-750P-xx Series

Power good signal :

Function	Description	Output
Power good signal	The signal is "High" when the power supply is above 20% of the rated output voltage, Power OK	High
	The signal turns to be "Low" when the power supply is Under 20% of the rated output voltage, Power Fail	Low