

Features

- Suitable for IT and Audio/Video Equipment
- Compliant to DoE 2016 (Level VI)
- ErP Stage 2, NRCan & GEMS Level VI
- No Load Power Consumption < 0.1 W
- Regulated Output with Low Ripple Noise
- 1 Year Warranty



Product similar to photo, variations possible.



Marks / Approvals



Specifications

	MODEL	Voltage	Min. Load	Max. Load	Max. Power
	ATS 060T-W120E	12 V	0.0 A	5.00 A	60 W
	ATS 060T-W150E	15 V	0.0 A	4.00 A	60 W
	ATS 060T-W180E	18 V	0.0 A	3.33 A	60 W
	ATS 060T-W190E	19 V	0.0 A	3.15 A	60 W
	ATS 060T-W240E	24 V	0.0 A	2.50 A	60 W
	ATS 060T-W300E	30 V	0.0 A	2.00 A	60 W
	ATS 060T-W480E	48 V	0.0 A	1.25 A	60 W
INPUT	Voltage	AC 100 V – 240 V			
	Frequency	50 Hz - 60 Hz			
	Current	1.50 A max.			
	Protection	Internal Primary Current Fuse, Inrush Limiting			
OUTPUT	Load Regulation	± 5 % (typical)			
	Ripple	1 % – 2 % V p-p max. for output voltage at full load			
	Transient Response	0.5 ms for 50 % load change typical			
	Leakage Current	0.25 mA max.			
	Protection	Short circuit Protection ▪ Over Voltage Protection ▪ Over Current Protection			
OTHERS	Cooling	Convection			
	Efficiency	DoE Level VI ▪ Energy Star ▪ ErP Stage 2 ▪ NRCan & GEMS Level VI Certified			
	Holdup Time	10 ms at full load			
	Dielectric Withstand	AC 3000 V Primary – Secondary			
	MTBF	300,000 calculated hours at 25 °C by telcordia SR-332			
ENVIRONMENT	Temperature	Operating: 0 °C – 40 °C / Storage: -20 °C – 80 °C			
	Humidity	Operating: 20 % RH – 80 % RH / Storage: 10 % RH – 90 % RH			
CONNECTION	Cable	Black UL 1185 18 AWG wire + plug; Length: 1500 mm			
	Plug	2.1 x 5.5 x 11 mm (tuning fork & cannelure); center positive			
EMI Conduction & Radiation	Compliance to EN 55022 Class B				
Harmonic Current	Compliance to EN 61000-3-2, -3				
EMS Immunity	Compliance to IEC 61000-1-2, -3, -4, -5, -6, -8, -11				
Safety	CE ▪ IEC 62368-1 ▪ EN 62368-1 ▪ IEC 60950-1 ▪ EN 60950-1				
Case Dimensions	95 mm x 54.4 mm x 35.5 mm (Europlug version)				
Weight	275 g				

Specifications subject to change without notice

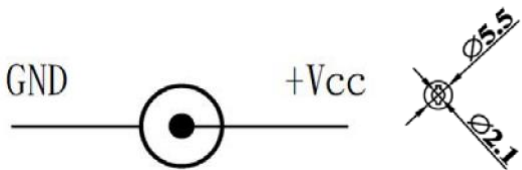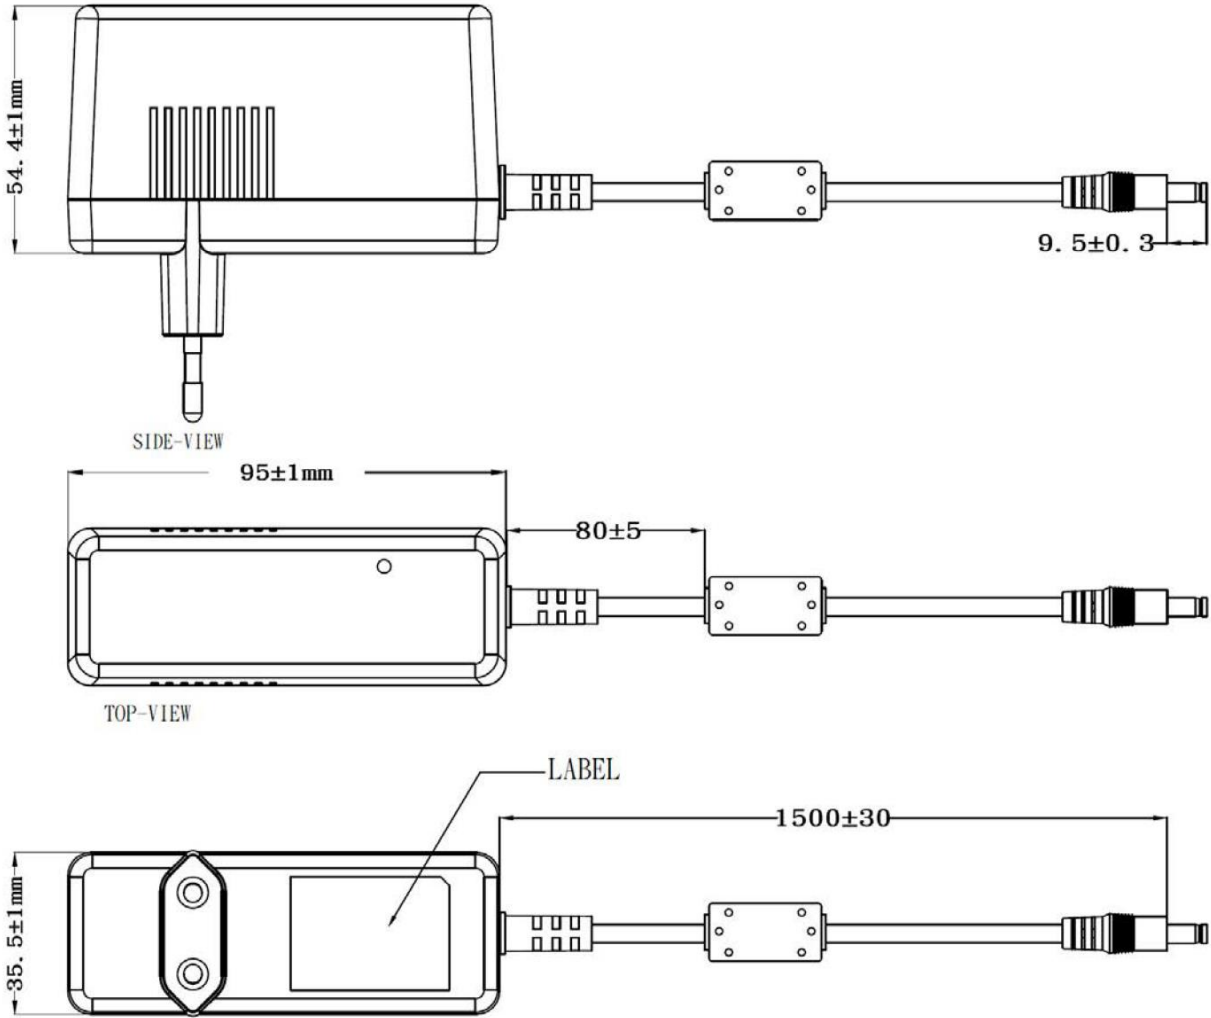

300%

ADAPTER TECH.

AC ADAPTER
MODEL : ATS060T-W240E
INPUT : 100-240V ~ 50-60Hz 1.5A MAX.
OUTPUT : 24V $\overline{\text{---}}$ 2.5A

LPS

CAUTION : Risk of electric Shock, dry location use only.

FOR INDOOR USE ONLY

EFFICIENCY LEVEL VI

Importer: Dehner Elektronik GmbH, Untere Bein 3, 65375 Oestrich-Winkel, Deutschland
 Manufacturer: Adapter Technology Co., Ltd, 6F-9, No.258, Liancheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan

RoHS

CE

D/C:1750
MADE IN CHINA
ID NO. X
XXX