


## Features

- Compliance to Lighting and LED Equipment Regulations
- IP20 for Indoor Installation
- MM Marking for Furniture Installation
- Suitable for LED Lighting Applications
- 1 Year Warranty



## Marks / Approvals

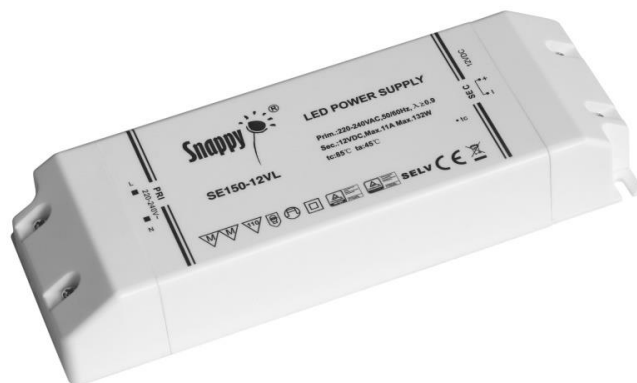

## Specifications

Image similar, variations possible

MODEL No.	PART No.	Voltage	Min. Load	Max. Load	Max. Power	Ripple & Noise
LED 12V150W-MM	SE150-12VL	12 V	0.00 A	11.0 A	132 W	300 mV p-p
LED 24V150W-MM	SE150-24VL	24 V	0.00 A	6.25 A	150 W	300 mV p-p
INPUT	<b>Voltage</b>	AC 200 V – 240 V				
	<b>Frequency</b>	50 Hz - 60 Hz				
	<b>Current (rms max)</b>	< 1.0 A				
	<b>Power Factor</b>	≥ 0.9				
PROTECTION	<b>Overload</b>	Yes, Auto Recovery				
	<b>Overvoltage</b>	Yes, Latch Off				
	<b>Short Circuit</b>	Yes, Auto Recovery				
	<b>Over Temperature</b>	Yes, temperature exceeding max. value at detection point				
	<b>Input Surge Current</b>	< 75 A				
OTHERS	<b>Cooling</b>	Convection Cooling				
	<b>Efficiency</b>	90 % typical				
	<b>Startup Time</b>	< 0.5 s				
	<b>Protection Marking</b>	IP20 (IEC 60529)				
	<b>Working Noise</b>	< 35 dB, pickup at 10 cm				
	<b>Protection Class</b>	Class II				
Environment	<b>Case Material</b>	Plastic cover with terminal block H03VVH2-F 2x0.75mm <sup>2</sup>				
	<b>Temperature</b>	Operating: -20 °C to 45 °C / Max. Case Temperature: 85 °C				
	<b>Humidity</b>	Operating: 45 % RH to 85 % RH				
<b>Lifetime</b>	30 000 hrs at max. Ta, rated input voltage, output max. rated power					
<b>SAFETY</b>	IEC / EN 61347-1, IEC / EN 61347-2-13					
<b>EMI</b>	EN 55015					
<b>EMS</b>	EN 61547					
<b>Harmonic</b>	EN 61000-3-2 Class C					
<b>Case Dimensions</b>	179.4 mm × 62.5 mm × 30.6 mm					

